




## SHURFLO 8000 SERIES

The 8000 Series diaphragm pump is Shurflo's most widely used agriculture pump. Viton® valve material and santoprene diaphragms assures maximum chemical resistance. 6.8 l.p.m. with choice of 60 or 100 p.s.i. models. Ideal replacement pump for all 12 volt sprayers.


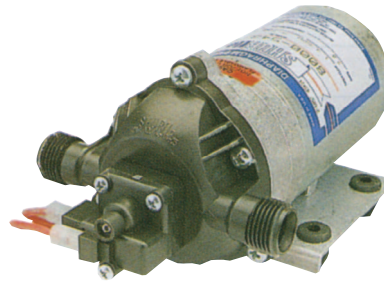


## SHURFLO 2088 SERIES

The 2088 Series diaphragm pumps deliver reliable performance in high flow, moderate pressure applications. 45 p.s.i. and 11.3 l.p.m. flow rate makes them ideal for small booms and liquid fertiliser applications.

## SHURFLO SLV SERIES

The SLV is ideal for low volume, intermittent-duty applications requiring a compact pump with low power consumption. Unique design has no metals in the fluid path for maximum chemical resistance. Cost effective with built-in on/off switch, yet with high performance and reliability.

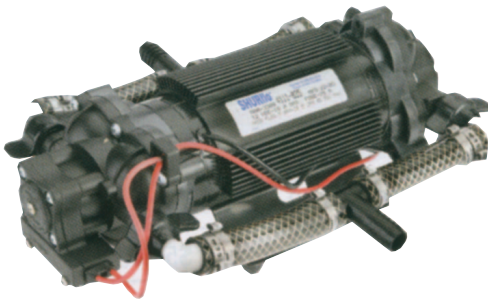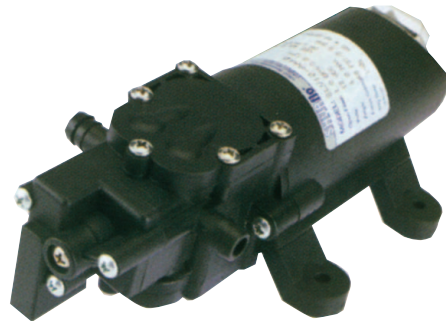

## SHURFLO POWER TWIN

Take all the performance and features of the 2088 series, double it and the result is the high flow (23.7 l.p.m.) Power Twin.

PUMP MODEL	PRESS SWITCH	MAX. L.P.M. OPEN FLOW	MAX. PRESS	AMPS	INLET & OUTLET	DIAPHRAGM MATERIAL	VALVE MATERIAL	VOLTS
SLV10-AA40	Yes	3.8 l.p.m.	40 p.s.i.	2.5	3/8" barbs	Santoprene	Viton	12
8000-543-136	Yes	6.8 l.p.m.	60 p.s.i.	8	1/2" BSP male	Santoprene	Viton	12
8000-543-138	Yes	6.8 l.p.m.	100 p.s.i.	8	1/2" BSP male	Santoprene	Viton	12
8000-853-238	Yes	6.8 l.p.m.	100 p.s.i.	4.5	1/2" BSP male	Santoprene	Viton	24
2088-343-135	Yes	11.3 l.p.m.	45 p.s.i.	7.7	1/2" BSP male	Santoprene	Viton	12
2088-313-145	Yes	13.6 l.p.m.	45 p.s.i.	9.5	1/2" BSP male	Santoprene	Viton	12
4111-035	Yes	23.5 l.p.m.	45 p.s.i.	17.2	1/2" barbs	Santoprene	Viton	12